


電力型不燃性固定線繞電阻器

Non-Flammable Fixed Wire-Wound Power Resistor

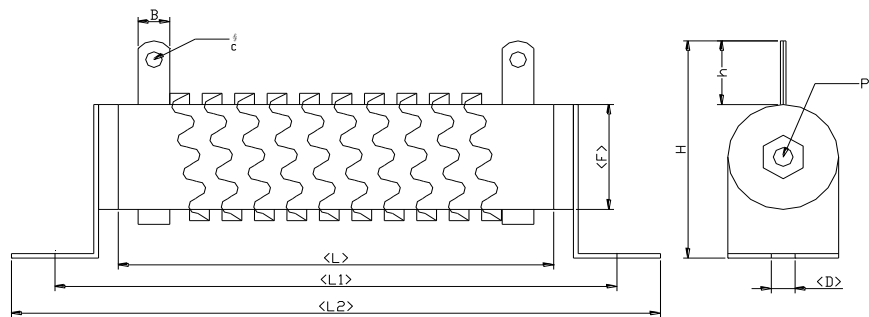

RATED 規 格 WATTS	D TYPE DIMENSIONS 寸法(m/m)										備 註
	L	F	B	L1	C ϕ	h	D	L2	H	P	繞線範圍(Ω)
75W	90	25	8	120	5	18	6	144	58	單 M5X115	0.5-10
90W	110	25	8	125	5	18	6	164	60	單 M5X135	0.5-11
100W	90	28	8	120	5	18	6	144	60	單 M5X115	0.5-12
120W	110	28	8	145	5	18	6	164	60	單 M5X135	0.5-13
150W	140	28	8	175	5	18	6	195	60	單 M5X165	0.5-15
180W	160	28	8	190	5	18	6	215	60	單 M5X185	0.5-18
200W	185	28	8	215	5	18	6	239	60	雙 M5X215	0.5-20
225W	195	28	8	225	5	18	6	249	60	雙 M5X220	0.5-22
240W	185	35	8	221	5	18	9	250	75	雙 M5X 210	0.5-24
300W	210	35	8	245	5	18	9	268	75	雙 M5X 245	0.5-27
350W	300	28	8	330	5	18	5	355	60	雙 M5X 325	0.5-27
375W	210	40	10	250	5	22	9	277	77	雙 M5X 245	0.5-30
450W	260	40	10	300	5	22	9	327	77	雙 M5X 295	0.5-35
600W	330	40	10	370	5	22	9	400	77	雙 M5X 365	0.5-40
750W	330	50	12	370	6	24	10	400	105	雙 M5X 365	0.5-50
900W	400	50	12	444	6	24	10	469	105	雙 M5X 435	0.5-60
1000W	460	50	12	505	6	24	10	532	105	雙 M5X495	0.5-70
1200W	460	60	15	508	6	30	10	535	112	雙 M5X495	0.5-90
1500W	540	60	15	587	6	30	10	615	112	雙 M6X600	1-120
2000W	650	65	15	690	6	30	10	720	115	雙 M6X690	1-160